

United States Patent [19]
Wolf et al.

[11] **Patent Number:** **4,612,996**

[45] **Date of Patent:** **Sep. 23, 1986**

[54] **ROBOTIC AGRICULTURAL SYSTEM WITH
TRACTOR SUPPORTED ON TRACKS**

[75] **Inventors:** Rodney A. Wolf, Amherst Junction;
Alan G. Zech, Viroqua, both of Wis.

[73] **Assignee:** Kimberly Hills, Ltd., Chicago, Ill.

[21] **Appl. No.:** 521,611

[22] **Filed:** Aug. 8, 1983

[51] **Int. Cl.⁴** A01B 69/00

[52] **U.S. Cl.** 172/26; 104/165;
104/169; 105/29 R; 105/177; 901/1; 172/3

[58] **Field of Search** 172/2, 3, 23, 24, 25,
172/26, 742, 796; 104/88, 130, 169, 165; 105/29
R, 177; 901/1; 280/43.22, 43.23; 212/218

[56] **References Cited**

U.S. PATENT DOCUMENTS

1,195,851 8/1916 Payne 104/169
3,845,718 11/1974 Rogers et al. 104/130
4,161,987 7/1979 Tolmer 172/796 X

FOREIGN PATENT DOCUMENTS

22834 6/1936 Australia 105/177
562825 12/1957 Belgium 172/26
2023332 12/1971 Fed. Rep. of Germany 172/26
2024755 12/1971 Fed. Rep. of Germany 172/26
2948531 6/1980 Fed. Rep. of Germany 172/26
1213046 10/1959 France 105/177
2420502 11/1979 France 212/218

Primary Examiner—Richard T. Stouffer


Attorney, Agent, or Firm—Niblack & Niblack

[57]

ABSTRACT

A robotic tractor that travels on rails forming a grid over a crop field and automatically performs tasks in the field is described. The tractor is supported on extendable legs that carry dual tandem perpendicular wheel sets. A rotary implement bed supported by the tractor is adapted to carry implements.

5 Claims, 19 Drawing Figures

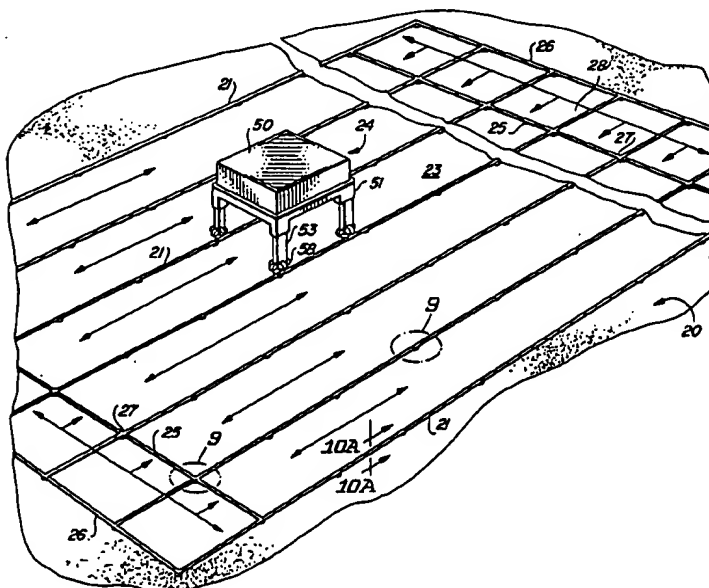



US005462122A

United States Patent [19]

Yamamoto et al.

[11] Patent Number: **5,462,122**[45] Date of Patent: **Oct. 31, 1995****[54] AUTOMATIC DRIVE CONTROL SYSTEM FOR A BULLDOZER**

[75] Inventors: **Shigeru Yamamoto; Shigenori Matsushita; Shu H. Zhang; Satoru Nishita; Kazushi Nakata**, all of Hiraoka, Japan

[73] Assignee: **Kabushiki Kaisha Komatsu Seisakusho**, Tokyo, Japan

[21] Appl. No.: **265,720**

[22] Filed: **Jun. 24, 1994**

[30] Foreign Application Priority Data

Jul. 8, 1993 [JP] Japan 5-169023

[51] Int. Cl.⁶ **E02F 3/76; E02F 3/00**

[52] U.S. Cl. **172/2; 172/4.5; 364/424.07**

[58] Field of Search 37/301, 236, 403; 172/1, 2, 3, 4, 4.5, 7, 40, 777, 812, 815, 821, 826, 831; 180/6.48, 24.12, 308, 333; 364/424.07, 424.1, 138, 468

[56] References Cited**U.S. PATENT DOCUMENTS**

3,556,225	1/1971	Matsuzaki	172/4.5
3,751,903	8/1973	Bauchet et al.	172/7 X
4,630,685	12/1986	Huck, Jr. et al.	
4,805,086	2/1989	Nielsen et al.	364/167.01
4,934,463	6/1990	Ishida et al.	172/4.5
5,297,649	3/1994	Yamamoto et al.	172/3 X

FOREIGN PATENT DOCUMENTS

53-5441	2/1978	Japan
53-6967	2/1978	Japan
55-36776	9/1980	Japan
63-31618	6/1988	Japan
1-62525	3/1989	Japan
3-43523	2/1991	Japan
6-3886	2/1994	Japan

Primary Examiner—Randolph A. Reese


Assistant Examiner—Robert Pezzuto

Attorney, Agent, or Firm—Armstrong, Westerman, Hattori, McLeland and Naughton

[57] ABSTRACT

An automatic drive control system for a bulldozer comprising a digging start detector for detecting that the bulldozer is in a digging start position, a digging end detector for detecting that the bulldozer is in a digging end position, a driving direction detector for detecting the momentarily varying driving direction of the bulldozer, and a drive controller for shifting a transmission into a forward gear when the digging start detector detects that the bulldozer is presently in the digging start position; shifting the transmission into a reverse gear when the digging end detector detects that the bulldozer is presently in the digging end position; and controlling the bulldozer such that the driving direction detected by the driving direction detector is made coincident with a target driving direction when the bulldozer is moving from the digging start position towards the digging end position.

21 Claims, 12 Drawing Sheets

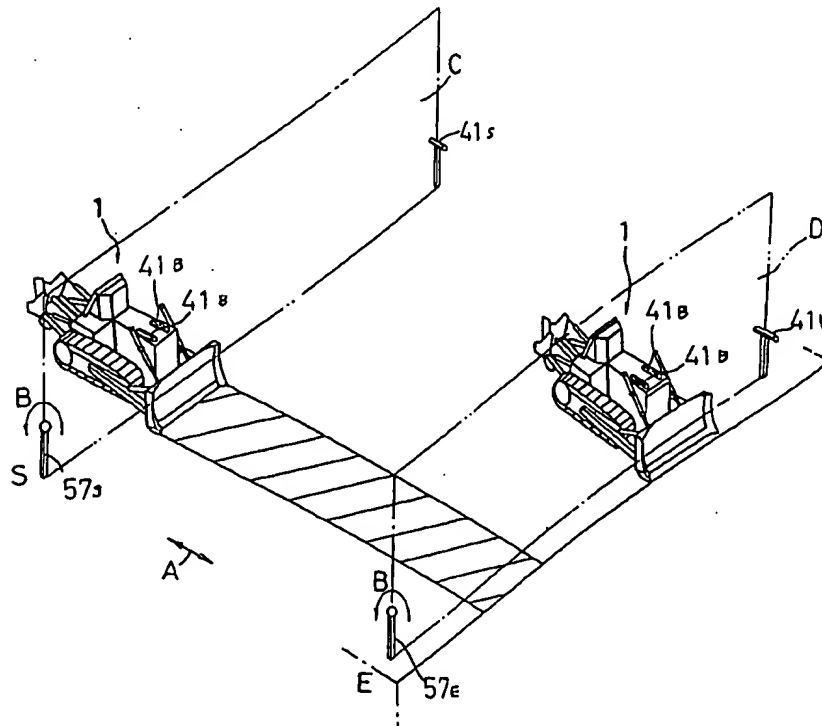

United States Patent [19]

Kanato et al.

[11] Patent Number: 4,825,956

[45] Date of Patent: May 2, 1989

[54] TRACTOR AND IMPLEMENT WITH IMPLEMENT INCLINATION CONTROL

[75] Inventors: Yuji Kanato; Nakashiro Mukai, both
of Ehime, Japan

[73] Assignee: Iseki & Co., Ltd., Japan

[21] Appl. No.: 26,309

[22] Filed: Mar. 16, 1987

[51] Int. Cl.⁴ A01B 63/10

[52] U.S. Cl. 172/2; 172/446

[58] Field of Search 172/2, 4.5, 446;
280/446 A

[56] References Cited

U.S. PATENT DOCUMENTS

4,535,847 8/1985 Hasegawa et al. 172/4.5 X

4,553,605 11/1985 Katayama et al. 280/446 A X

FOREIGN PATENT DOCUMENTS


58-216602 12/1983 Japan .

Primary Examiner—Richard T. Stouffer
Attorney; Agent, or Firm—Burd, Bartz & Gutenkauf

[57] ABSTRACT

A roll control structure adapted to automatically control an earth working machine, such as a rotary cultivator so that the machine becomes horizontal in the lateral direction irrespective of the inclination of the ground surface, i.e., in such a manner that the machine assumes a posture preset by the operator. The roll control structure is characterized in that it is provided with left and right stroke sensors for detecting strokes, i.e. a distance between arbitrary points on the left and right lift arms in an earth working implement connecting link mechanism and those on the left and right lower links in the same mechanism to determine an angle of inclination in the lateral direction of the implement with respect to a tractor on the basis of a difference between the detected strokes.

9 Claims, 4 Drawing Sheets

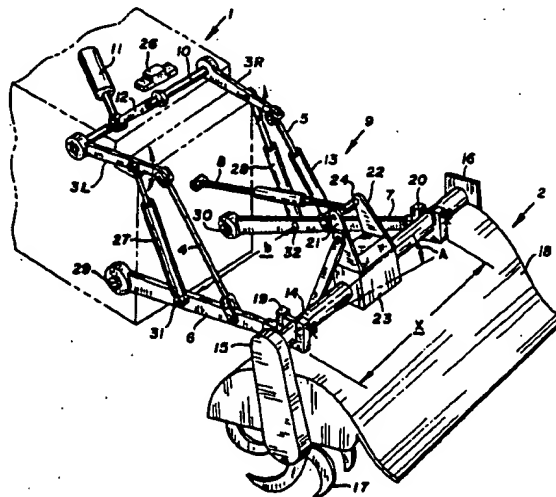

United States Patent [19]
Smith

[11] Patent Number: 4,802,293

[45] **Date of Patent:** Feb. 7, 1989

- [54] **ADJUSTABLE EARTH-MOVING
ATTACHMENT FOR A VEHICLE**
- [76] **Inventor:** **Raymond H. Smith, Rte.2, 5AAA,
Larned, Kans. 67550**
- [21] **Appl. No.:** **123,608**
- [22] **Filed:** **Nov. 20, 1987**
- [51] **Int. Cl.⁴** **E02F 5/00**
- [52] **U.S. Cl.** **37/108 R; 37/268;
37/269; 37/273; 37/274; 37/271; 172/787;
172/799.5**
- [58] **Field of Search** **37/108 R, 108 A, 110,
37/268, 269, 273, 274, 276, 285, 287, 219, 221;
172/786, 787, 799.5, 155, 169, 188, 191, 201**
- [56] **References Cited**

U.S. PATENT DOCUMENTS

- | | | | |
|-----------|---------|--------------------|-----------|
| 561,988 | 6/1896 | Harmon . | |
| 746,547 | 12/1903 | Miller . | |
| 803,821 | 11/1905 | Grimes | 37/269 |
| 871,976 | 11/1907 | Whitney . | |
| 964,159 | 7/1910 | Grimes | 37/269 |
| 1,266,532 | 5/1918 | Mitchell | 172/786 |
| 1,329,543 | 2/1920 | Northon | 172/787 |
| 1,331,382 | 2/1920 | Rolland . | |
| 1,354,264 | 9/1920 | Miller | 172/786 |
| 1,537,091 | 5/1925 | Snyder et al. | 37/108 R |
| 1,540,161 | 6/1925 | Callison et al. . | |
| 1,557,035 | 10/1925 | Dost . | |
| 1,575,814 | 3/1926 | Burson | 172/786 X |
| 1,719,886 | 7/1929 | Homan | 37/281 |


- | | | | |
|-----------|---------|------------------|-----------|
| 2,615,264 | 10/1952 | Satterthwaite . | |
| 2,644,252 | 7/1953 | Brown . | |
| 2,749,631 | 6/1956 | Thompson . | |
| 2,806,305 | 9/1957 | Ulrich . | |
| 2,876,852 | 3/1959 | Kenney . | |
| 3,039,209 | 6/1962 | Cron et al. . | |
| 3,195,249 | 7/1965 | Collins | 772/786 |
| 3,352,036 | 11/1967 | Miller . | |
| 3,424,251 | 1/1969 | Bouley . | |
| 3,435,546 | 4/1969 | Iverson . | |
| 3,471,953 | 10/1969 | Wyatt . | |
| 3,772,804 | 11/1973 | Bomeke . | |
| 3,841,006 | 10/1974 | Mironov et al. . | |
| 4,215,495 | 8/1980 | Wagner . | |
| 7,734,293 | 2/1956 | Barnes | 172/799.5 |

Primary Examiner—Eugene H. Eickholt
Attorney, Agent, or Firm—Litman McMahon & Brown

[57] **ABSTRACT**

An earth-moving attachment for use with a vehicle includes a pair of earth-moving blade assemblies mounted on a main beam. The earth-moving blade assemblies are adapted to be independently movable in several planes with respect to each other and with respect to the main beam so that a plurality of earth-working operations can be performed, and the attachment is amenable for use in conjunction with a wide variety of terrains. The blade assemblies are mounted and designed to efficiently transfer forces with the main beam.

27 Claims, 3 Drawing Sheets

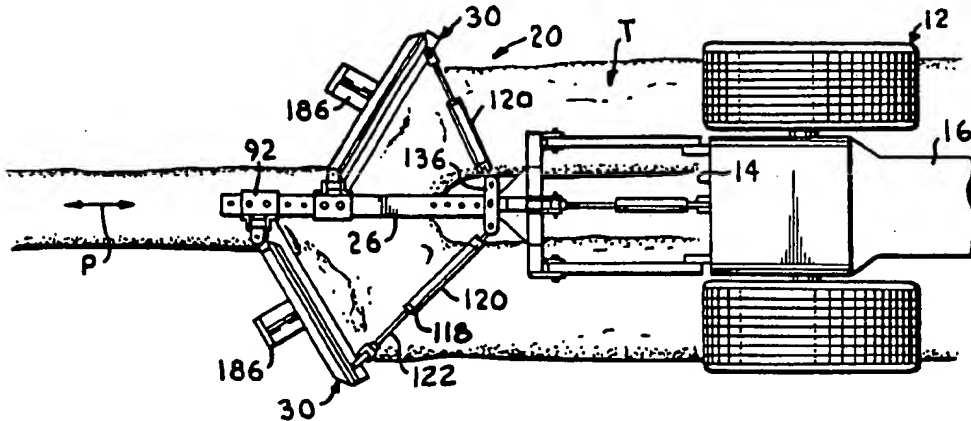

United States Patent [19]
Johnson

[11] Patent Number: **4,506,465**
[45] Date of Patent: **Mar. 26, 1985**

[54] **PIVOTABLE TOWED SNOW REMOVAL
BLADE**

[75] Inventor: **Terry D. Johnson, Littleton, Colo.**
[73] Assignee: **Melvin L. Robinson, Cherokee, Iowa**
; a part interest
[21] Appl. No.: **452,117**
[22] Filed: **Dec. 22, 1982**

[51] Int. Cl.³ **E01H 5/06**
[52] U.S. Cl. **37/268; 172/799.5**
[58] Field of Search **37/197, 103, 117.5,**
37/268-271, 129, DIG. 3, 2 R, 14, DIG. 12,
130-133, 126 R, 124, 118 R; 172/196, 799.5

[56] **References Cited**

U.S. PATENT DOCUMENTS

2,059,818	11/1936	Simon	37/271 X
2,292,904	8/1942	Shollenberger	37/2 R X
2,311,639	2/1943	Click	37/133
2,552,426	5/1951	Hedley	37/271 X
2,689,055	9/1954	Kizer et al.	56/474
2,695,490	11/1954	Bohner	56/474
2,840,933	7/1958	Brem	37/117.5
2,923,074	2/1960	Tucker	37/117.5 X
3,044,196	7/1962	Kinney	37/266 X
3,160,215	12/1964	Harrell	37/2 R X
3,430,703	3/1969	Richey	37/117.5
3,547,203	12/1970	Jackoboice	37/117.5
3,800,447	4/1974	Harvey	37/268 X

4,010,561 3/1977 Klett 37/DIG. 12
4,010,805 3/1977 Kelley 37/2 R X

OTHER PUBLICATIONS


First Press Release: Snowdozer 620, Dec. 28, 1981.
Snowdozer Model 620, not earlier than Jan. 1982.

Primary Examiner—E. H. Eickholt
Attorney, Agent, or Firm—Merchant, Gould, Smith,
Edell, Welter & Schmidt

[57] **ABSTRACT**

Apparatus and method for snow removal is disclosed. A wheeled frame having an adjustable suspension capable of operation in a snow removal and a transport position is provided. The frame is open at one end and includes a hitch at the other end for connection to a prime mover. Two vertical snow cutting knives are connected to the frame near the open end thereof with a horizontal snow cutting knife connecting the vertical knives proximate the ground. A snow moving blade is pivotably supported to the frame and actuated by a pair of double acting cylinders to move up and down. In operation the open end of the apparatus is pushed into a pile of snow and snow is cut loose by the knives. The blade is then lowered into close proximity with the ground and near the open end of the frame whereby a selected quantity or block of snow may be pulled or towed away.

3 Claims, 4 Drawing Figures

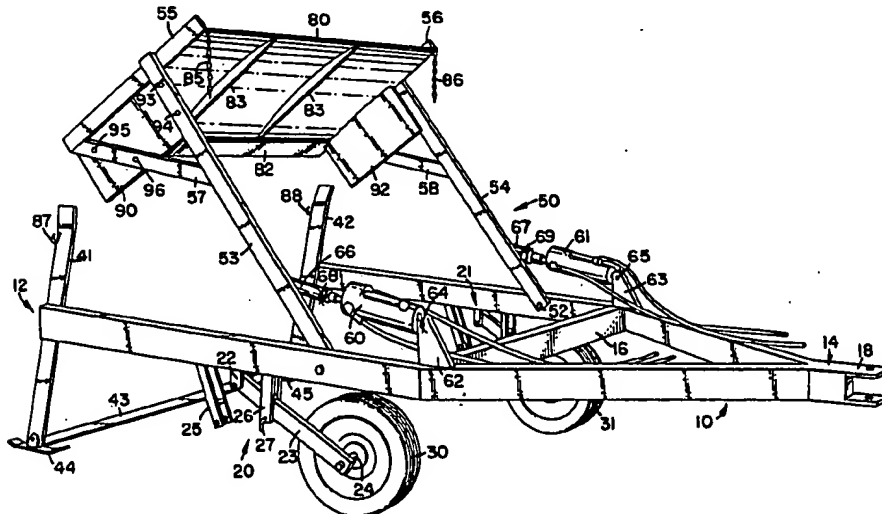

[54] **EARTH MOVING APPARATUSES AND PROCESS**
[76] Inventor: **Robert L. Reinhardt**, P.O. Box 2451,
Lubbock, Tex. 79401
[22] Filed: **May 30, 1972**
[21] Appl. No.: **257,638**

3,670,913	6/1972	Reaves.....	214/83.32
3,533,174	10/1970	Carston.....	37/8
3,474,548	10/1969	Miller.....	37/8
3,431,659	3/1969	Eiger.....	37/4
3,191,322	6/1965	Johnson et al.....	37/8
2,791,044	5/1957	Hancock.....	37/126
2,464,098	3/1949	Pittlick.....	37/8

[52] U.S. Cl. 37/4, 37/126, 214/83.32,
198/213
[51] Int. Cl. B60p 1/00
[58] Field of Search 37/4, 8, 9, 124-126,
37/129; 198/213, 216, 64, 121-125; 214/501,
83, 83.26, 83.32

Primary Examiner—William B. Penn
Assistant Examiner—Eugene H. Eickholt
Attorney—Ely Silverman

[57] **ABSTRACT**

In earth moving apparatuses dual screw conveyors are resiliently spaced from and supported by a hood there-over which hood is movably mounted at its front end in the mouth of a scoop and transport bowl to accommodate surges in feed, to fully and evenly and quietly and safely load the bowl and to smoothly unload the bowl.

6 Claims, 20 Drawing Figures

[56] **References Cited**
UNITED STATES PATENTS
2,956,809 10/1960 Huddle et al. 214/83.32 X
3,445,943 5/1969 Crum 214/83.32 X

